

TELEHANDLER



HTL 4017



Adaptability and performance

- Optimised load rating
- Hydraulic control for standard accessories
- Tilt corrector as standard

Power and precision

- Standard hydrostatic transmission
- Simultaneous and proportional controls of all 4 movements of the boom with flow sharing

Safety and reliability

- Standard rear axle locking
- Dangerous movements cut out switch



Placing height : 16.7 m



Maximum lift capacity :
4000 kg

www.haulotte.com.au

Haulotte
More than lifting



HTL 4017



TELEHANDLER

Haulotte GROUP

Placing height : 16.7 m
Maximum lift capacity : 4000 kg

PERFORMANCES




Maximum lift capacity	4000 kg
Lift capacity to full height	2500 kg
Lift capacity at full reach	700 kg
Maximum fork height	16.7m
Reach at maximum fork height	2.4 m
Maximum forward reach	12.85 m

DIMENSIONS

A Length	6.76 m
B Width	2.43 m
C Height	2.67 m
D Wheelbase	2.9 m
E Ground clearance	50 cm
F Track width	1.93 m
G Cab width	0.96 m
H Overall width - stabilizers down	3.34 m
I Height to high boom pivot	1.75 m
J Approach angle	29°
K Upper rotation of forks	18°
L Lower rotation of forks	104°
Weight with forks	12800 kg
Tyres type	18 - 22.5 TMR4

ENGINE

Engine model	Deutz BF04M2012
Engine Capacity	4038 cm ³
Engine power output	74,9 kW / 102 CV
Engine torque	0
Transmission type	Hydrostatic
Fuel tank	132.5 l
Engine oil	110 l

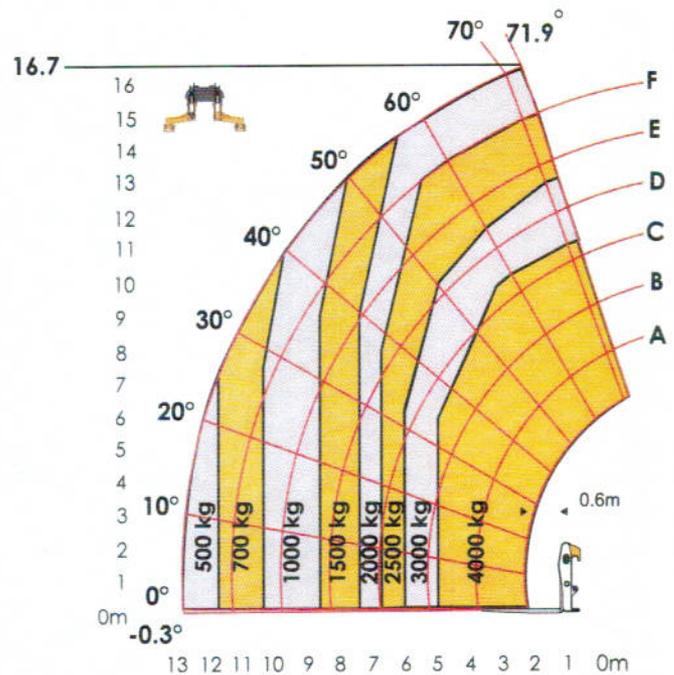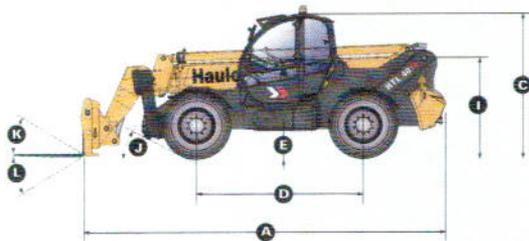

STANDARD EQUIPMENT

- Hydrostatic transmission with variable capacity pump and engine
- 4 wheel drive and steer
- Fuel filter with water separator
- Load sensing equipment pump
- Flow-Sharing electrically controlled controls
- Proportional controls for movement of boom/telescopic arm/excavation and accessories
- Safety valves on hydraulic jacks
- Possibility to combine mast/telescopic boom/excavation and accessories movements
- Auxilliary hydraulic ports
- Overload/dangerous movements cut out switch
- Tilt corrector: +/- 10°
- Long stabilizers and large footplates for greater stability
- ROPS/FOPS cabin with heating and ventilation
- Hydraulic axle locking

OPTIONS AND ACCESSORIES

- Cold Weather Package
- Biodegradable oil
- Cold environment oil
- Hot environment oil
- Air conditioning
- Working lights
- Metal windscreen protector (FOPS)
- 4-in-1 bucket: 1m³ or 0.75m³

HTL-4017 Load Chart - Standard Forks



This load chart only applies to Haulotte attachments

HTL-4017

Part number/s

- 194P287760
- 194P306620
- 194P306810
- 194P270330

Max. capacity
4000kg
Mass 265kg

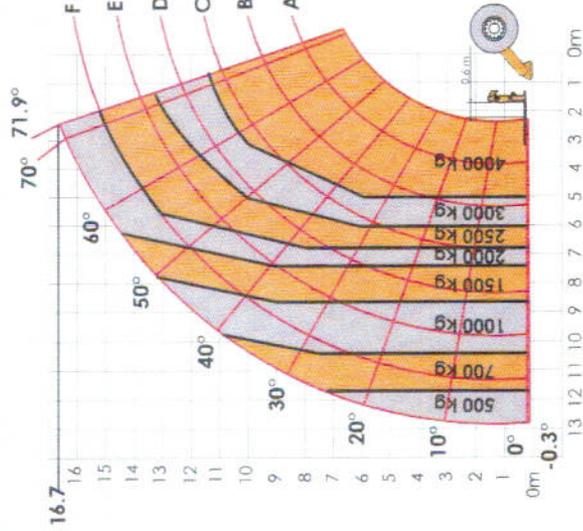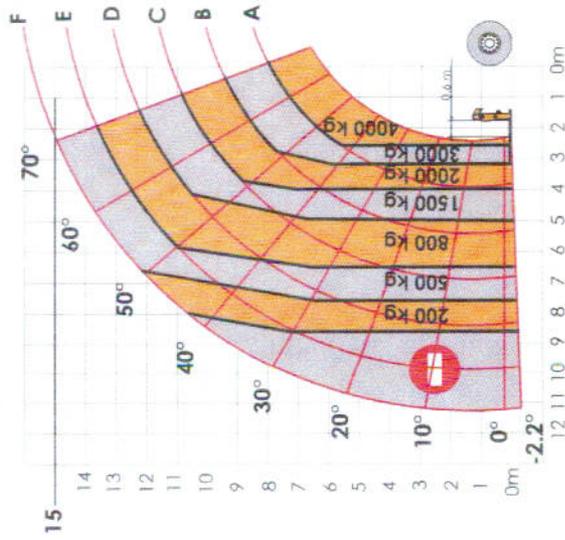

WARNING: Load Charts are different for each attachment fitted to the Telehandler. Please ensure the attachment part number is as shown above. Use only Haulotte attachments.

SAFE USE INFORMATION

Tyre Size and Pressure

	SOLIDEAL	MITAS
Size	18-22.5 4LR4	18-22.5 MPT-06
Pressure	450 kpa (65 psi)	510 kpa (74 psi)
Ply rating	16PR	16PR

Pick & Carry Information

1. Travel speed with rated load 0.4 m/s (1.5km/h) (walking speed)
2. Boom fully retracted with rated load 300mm above the ground
3. In-service wind speed 10 m/s - 36 km/h
4. Ground conditions: solid surfaces for lifting and travelling

Stationary

With rated load



Pick and Carry (Travelling)

With rated load

